

EXTRUSION INDUSTRY

0.

BIAX FILM MDO FILM CAST FILM BLOWN FILM EXTRUSION COATING FOAM







FRANCE HEADQUARTERS

Founded in 1992, SCANTECH was first to introduce low-energy x-ray transmission technology for the measurement of lightweight materials. Today, over 1,000 scanners are installed annually around the world for many types of production lines, including all types of extruded films, non-woven fibers, lamination and coatings processes, and metals.

SCANTECH continues to lead the world-wide market for X-ray, laser, infrared, and microwave online measurement and control systems, as well as visual inspection tools thanks to our focus on innovation. We are dedicated to expanding and perfecting our offer to include groundbreaking technology, incorporating laser triangulation, ergonomic UI, and automatic calibration.

SCANTECH is headquartered in France, with fully-owned subsidiaries in China (Guangzhou), the USA, Germany, Italy, South Korea, India, Malaysia, and Taiwan. All core components, such as sensors and electronic circuit boards, are designed in France and the entire production process is supervised by French professional and technical personnel. To ensure product quality and customer satisfaction, each subsidiary provides comprehensive customer support, and installation and maintenance services locally. With multiple assembly centers around the world, SCANTECH can supply the same highquality products to domestic customers, and provide timely service and a complete stock of spare parts.

Each center is in full accordance with the quality standards of SCANTECH's production plant in France.

ORLINE R AND CO

SYSTEMS INSTALLED EACH YEAR

7000+ SYSTEMS INSTALLED WORLDWIDE




SCAN ME AND DISCOVER MORE ABOUT SCANTECH

AEASUREMENT NTROL



BIAX FILM

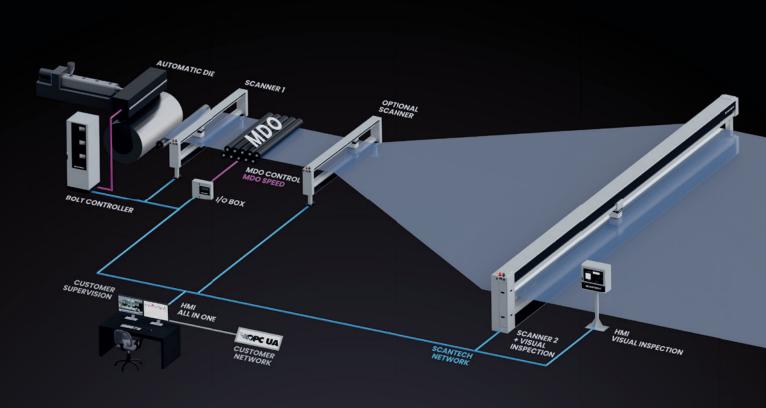

CONTROL



AUTO MAPPING APC - Auto Profile Control



CASCAD CONTROL



TDO STRETCH PROFILE



BOLT CONTROLLER Power & Temperature control up to 360 bolts




MELT FLOW MODEL



MACHINE DIRECTION CONTROL

BIAX SCANNERS

Powerhouse performance

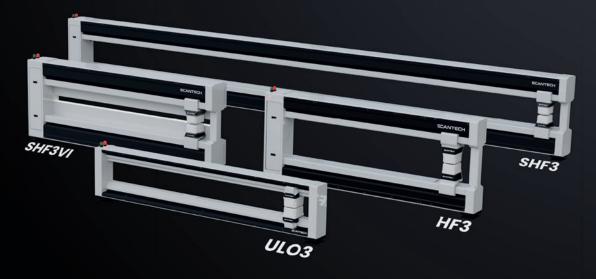

FROM 500 mm TO 15000 mm

BIAX FILM FEATURES















Porosity

TDO Stretch Profile

Edge ile Profile Defect Detection Filler: CaCo₃ | TiO₂ | BaSo₄

FX FLEXSCAN

INDUSTRY 4.0


Bolt representation and automatic die control



www.scantech.com



BLOWN FILM FASTER AND MORE ACCURATE

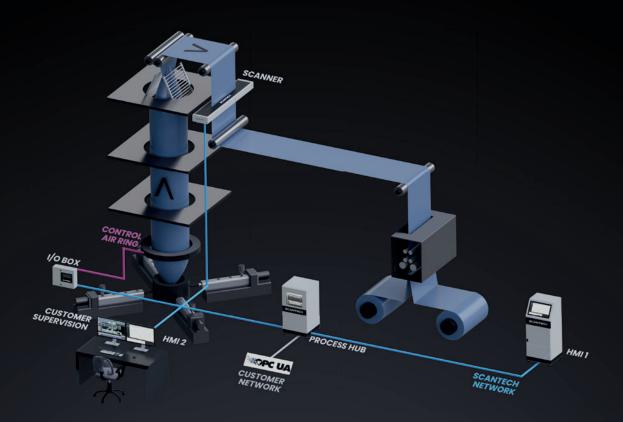

CONTROL



ACCURATE







AUTO MAPPING APC - Auto Profile Control

INDIVIDUAL WINDER REPORTS





ΜŴ

INDIVIDUAL POLAR COLOR MAPS



AVAILABLE WIDTHS: LH3 FROM 500 mm TO 3500 mm | HH3 FROM 3500 mm TO 7000 mm

BLOWN FILM MEASUREMENTS







Thickness


Barrier Layer

Filler: CaCo₃ | TiO₂ | BaSo₄




INDUSTRY 4.0

Interactive graphical representation of a polar profile

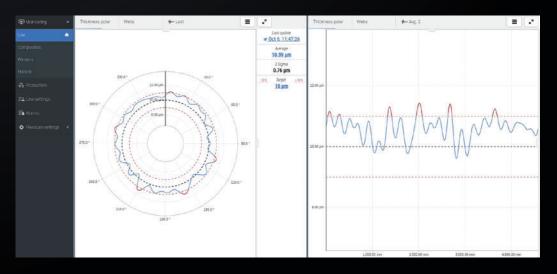



CAST FILM

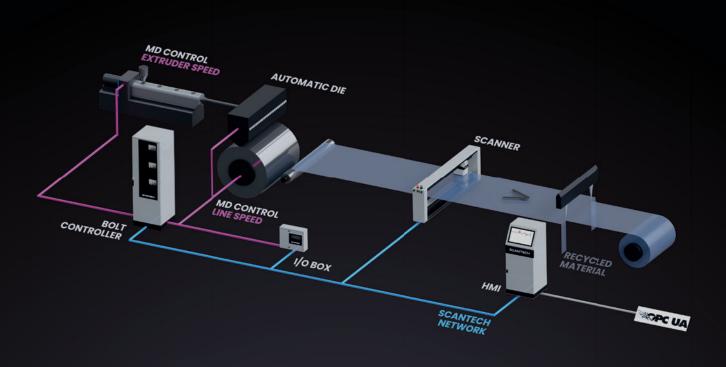

CONTROL



AUTO MAPPING APC - Auto Profile Control



MACHINE DIRECTION CONTROL



MELT FLOW MODEL



Power & Temperature control up to 360 bolts

ULO3 | HF3 | SHF3VI

A combination of measurement solutions



AVAILABLE WIDTHS: ULO3 FROM 500 mm TO 3500 mm | HF3 FROM 500 mm TO 11500 mm SHF3+VI FROM 500 mm TO 15000 mm

CAST FILMS FEATURES











Thickness

Barrier Layer

Density

Defect Detection

Filler: CaCo₃ | TiO₂ | BaSo₄



SEC UA INC


INDUSTRY 4.0

Bolt representation and automatic die control





FOAM

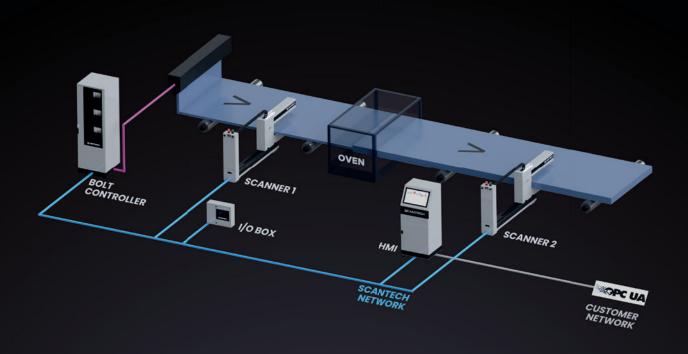


LINE CONTROLS



AUTO MAPPING APC - Auto Profile Control



MACHINE DIRECTION CONTROL



EXTRUSION CONTROL



Power & Temperature control up to 360 bolts

SC3 | HF3



AVAILABLE WIDTHS: SC3 FROM 500 mm TO 2000 mm | **HF3** FROM 500 mm TO 11500 mm

FOAM FEATURES









Thickness

Basis Weight

Density

Defect Detection



SEC UA


INDUSTRY 4.0

Representation of 3 measurements: thickness, basis weight and density

🕼 Monitoring 🛛 👻	Thickne	wa Winder	section 1	∳~Last	th.			1	=	-	1
											Loudaned at v 10. 16:16:52
	60.00 ten-										Armape 16.84 mm
	30.00 mm	******									2 Signa
	0.00 mm										Targel - 27 mm
	4 0.00 mm 50.00 mm 300.00 mm 300.00 mm 200.00 mm								40.mm		
	Weight	Winder	section 1	- Lost	ħ			1	=		1
E Alarma	800.00 pm										Updativer at v 10, 36:16:52
		**********									Armor
C resourcerings C	403.00 g/s									5	5.18 g/m ²
C C RADON RELEIGE											2 Signa
C Harden Belangs	ACC 20 gev									30	5.18.g/m ³ 2.Septa 53.55 g/m ³ Target - per per
C rosserings			\$1.00 en				200 80 mm			30	2 Signa 3.55 g/m ²
U social dell'igi										30	5.18.g/m ³ 2.Septa 53.55 g/m ³ Target - per per
t internet	XXX XX get		56.60-em		206.00 mm					36 Marrie	55.18 g/m ³ 2 Signa 53.55 g/m ³ Target <u>signar</u> 550 g/m ²
k	Std. 55 gev Density 20-00 system	Winder	storen section 1		200.00 mm		200 JB rem		=	36 	65.18 g/m ² 2 Signa 33.55 g/m ² Tarpet <u>concer</u> 5500 g/m ²
1	acti od gev	Winder	storen section 1	∳~ Last	200 00 mm	Billion	200 30 mm	1] =]	56 	45.18.g/m ² 2.Signal 33.55 g/m ² 343.55 g/m ² 3560.g/m ² 4.Signal 4.Signal 5.47 kg/m ² 2.Signal
k.	Std. 55 gev Density 20-00 system	Winder	storen section 1	∳~ Last	200 00 mm	Billion	200 30 mm	1] =]	36 	45.18 g/m ² 2 Signal 33.55 g/m ² Tarpet _starper' 560 g/m ² Upstant at w10.151.6.52 Average 5.47 kg/m ² 2 Signal



MDO FILM

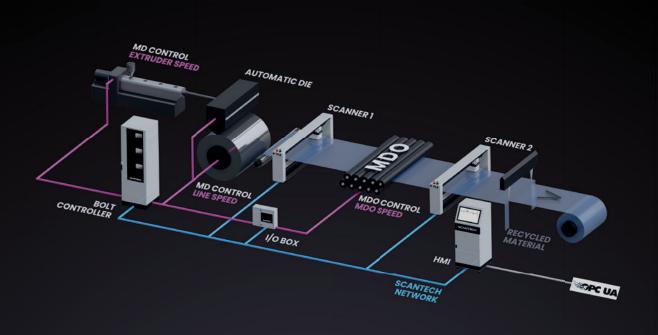

CONTROL



AUTO MAPPING

APC - Auto Profile Control



BOLT CONTROLLER

Power & Temperature control up to 360 bolts



MACHINE DIRECTION CONTROL




MELT FLOW MODEL



SAME SPOT



A combination of measurement solutions

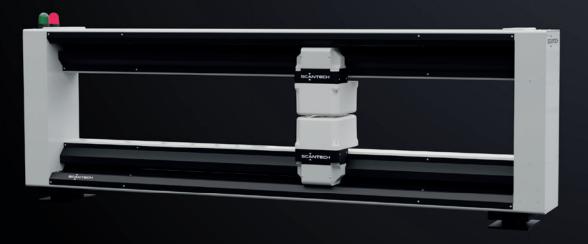

AVAILABLE WIDTHS: FROM 500 mm TO 3500 mm

MDO FILM MEASUREMENTS













Thickness

Barrier Layer

Density Defect Detection

Porosity

CaCo₃ | TiO₂ | BaSo₄

Filler



INDUS

```
INDUSTRY 4.0
```


Bolt representation and automatic die control



www.scantech.com



EXTRUSION COATING

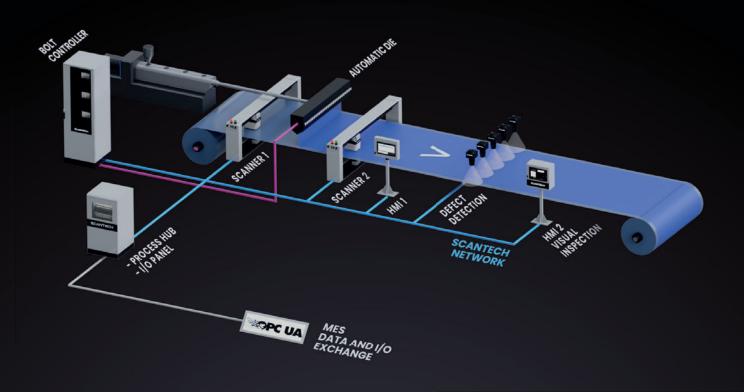

CONTROL



AUTO MAPPING APC - Auto Profile Control



Power & Temperature control up to 360 bolts



SAME SPOT



MACHINE DIRECTION CONTROL



A combination of measurement solutions



AVAILABLE WIDTHS: FROM 500 mm TO 3500 mm

EXTRUSION COATING FEATURES



Coating Thickness



Defect Detection



Differential Deduction



INDUSTRY 4.0

Bolt representation and automatic die control



SCANTECH®

A WORLDWIDE GROUP





FRANCE - HEADQUARTERS

Scantech S.A.S Bâtiment Andromede 108 Avenue du Lac Léman Savoie Technolac 73290 La Motte Servolex France +33 (0)4 79 25 05 25



GERMANY - SUBSIDIARY

Scantech Germany GMBH Rennweg 60 D - 56626 Andernach Germany +49 2632 / 95 89 470

CHINA - SUBSIDIARIES

Scantech Guangzhou 101/201, Building 2, No.10, Hefeng Yi Jie, Huangpu District, Guangzhou, 511356 China +86 20 3216 5036 Scantech Taiwan Co. Ltd. No. 173, Fu 5th St., Qidu Dist., Keelung City, 20648, +886-2-24523175



AMERICAS - SUBSIDIARY

Scantech Americas, Inc. 8637 Grovemont Circle Gaithersburg, MD 20877 USA +1 301 990 9201



ITALY - SUBSIDIARY

Scantech Italy S.R.L Via F. Petrarca, 35 50041 Calenzano (FI) Italy +39 055 4564399



INDIA – SUBSIDIARY

Scantech India PAP A-9/3/3, PHASE 4 CHAKAN MIDC, POST NIGHOJE, KHED PUNE-410501 Pune Maharashtra 410501 India +91 8983007016



SOUTH KOREA - SUBSIDIARY

Scantech Korea #1808, 6 Samseong-ro 96-gil, Gangnam-gu, Seoul, 06168 Korea +82 (0)70 8842 3889 (*

MALAYSIA - SUBSIDIARY

Scantech South East Asia SDN BHD B-G.29, BLOCK B. JALAN PIU IA/3J, TAIPAN 1, Ara Damamsra, 47301 Petaling Java, Selangor Darul Ehsan Malaysia +6019 355 9395